

Package ‘priorCON’

September 26, 2026

Type Package

Title Graph Community Detection Methods into Systematic Conservation Planning

Version 0.1.8

Maintainer Christos Adam <econp266@econ.soc.uoc.gr>

Description An innovative tool-set that incorporates graph community detection methods into systematic conservation planning. It is designed to enhance spatial prioritization by focusing on the protection of areas with high ecological connectivity. Unlike traditional approaches that prioritize individual planning units, 'priorCON' focuses on clusters of features that exhibit strong ecological linkages. The 'priorCON' package is built upon the 'prioritizr' package <[doi:10.32614/CRAN.package.prioritizr](https://doi.org/10.32614/CRAN.package.prioritizr)>, using commercial and open-source exact algorithm solvers that ensure optimal solutions to prioritization problems.

License GPL-3

Encoding UTF-8

URL <https://github.com/cadam00/priorCON>,
<https://cadam00.github.io/priorCON/>

BugReports <https://github.com/cadam00/priorCON/issues>

Imports utils, prioritizr (>= 9.0.1), terra (>= 1.8.21), highs (>= 0.1.10), tmap (>= 4.0), sf (>= 1.0.19), brainGraph (>= 3.1.0),
igraph (>= 2.1.4)

Depends R (>= 4.1.0)

RoxygenNote 7.3.2

Suggests knitr, rmarkdown, testthat (>= 3.0.0)

Config/testthat/edition 3

VignetteBuilder knitr, rmarkdown

NeedsCompilation no

Author Christos Adam [aut, cre] (ORCID:
[<https://orcid.org/0009-0003-3244-7034>](https://orcid.org/0009-0003-3244-7034)),
Aggeliki Doxa [aut] (ORCID: [<https://orcid.org/0000-0003-4279-1499>](https://orcid.org/0000-0003-4279-1499)),
Nikolaos Nagkoulis [aut] (ORCID:
[<https://orcid.org/0000-0002-1900-2634>](https://orcid.org/0000-0002-1900-2634)),
Maria Papazekou [aut] (ORCID: [<https://orcid.org/0000-0001-7063-9553>](https://orcid.org/0000-0001-7063-9553)),
Antonios D. Mazaris [aut] (ORCID:
[<https://orcid.org/0000-0002-4961-5490>](https://orcid.org/0000-0002-4961-5490)),
Stelios Katsanevakis [aut] (ORCID:
[<https://orcid.org/0000-0002-5137-7540>](https://orcid.org/0000-0002-5137-7540))

Repository CRAN

Date/Publication 2026-09-26 16:40:02 UTC

Contents

basic_scenario	2
connectivity_scenario	4
get_cost_raster	5
get_features_raster	6
get_metrics	7
get_outputs	8
graph_connectivity_rasters	10
preprocess_graphs	11
Index	14

basic_scenario	<i>Basic scenario problem</i>
----------------	-------------------------------

Description

Solve an ordinary **prioritizr** prioritization problem.

Usage

```
basic_scenario(cost_raster, features_rasters, budget_perc, locked_in = NULL,  
locked_out = NULL)
```

Arguments

- cost_raster SpatRaster object used as cost for prioritization. Its coordinates must correspond to the input given at [preprocess_graphs](#).
- features_rasters features SpatRaster object used for prioritization. Its coordinates must correspond to the input given at [preprocess_graphs](#).

budget_perc	numeric value $[0, 1]$. It represents the budget percentage of the cost to be used for prioritization.
locked_in	SpatRaster object used as locked in constraints, where these planning units are selected in the solution, e.g. current protected areas. For details, see <code>prioritizr::add_locked_in_constraints</code> .
locked_out	SpatRaster object used as locked out constraints, where these planning units are excluded from the solution, e.g. not appropriate for protected areas. For details, see <code>prioritizr::add_locked_out_constraints</code> .

Details

A basic prioritization problem is created and solved using **prioritizr** package. The solver used for solving the problems is the best available on the computer, following the solver hierarchy of **prioritizr**. By default, the **highs** package using the **HiGHS** solver is downloaded during package installation.

Features and connectivity rasters are min-max scaled before solving the prioritization problem.

Value

A list containing input for `get_outputs`.

References

Hanson, Jeffrey O, Richard Schuster, Nina Morrell, Matthew Strimas-Mackey, Brandon P M Edwards, Matthew E Watts, Peter Arcese, Joseph Bennett, and Hugh P Possingham. 2026. `prioritizr`: Systematic Conservation Prioritization in R. <https://CRAN.R-project.org/package=prioritizr>.

Hanson JO, Schuster R, Strimas-Mackey M, Morrell N, Edwards BPM, Arcese P, Bennett JR, and Possingham HP. 2025, Systematic conservation prioritization with the `prioritizr` R package. *Conservation Biology*, 39: e14376. doi:10.1111/cobi.14376

Huangfu, Qi, and JA Julian Hall. 2018. Parallelizing the Dual Revised Simplex Method. *Mathematical Programming Computation* 10 (1): 119–42. doi:10.1007/s1253201701305

See Also

`preprocess_graphs`, `get_metrics`

Examples

```
# Read connectivity files from folder and combine them
combined_edge_list <- preprocess_graphs(system.file("external", package="priorCON"),
                                         header = FALSE, sep = ";")

# Set seed for reproducibility
set.seed(42)

cost_raster <- get_cost_raster()
features_rasters <- get_features_raster()

# Solve an ordinary prioritizr prioritization problem
```

```
basic_solution <- basic_scenario(cost_raster=cost_raster,
                                features_rasters=features_rasters, budget_perc=0.1)

# Plot solution raster
terra::plot(basic_solution$solution, main="Basic Solution")
```

connectivity_scenario *Connectivity scenario problem*

Description

Solve a **prioritizr** prioritization problem, by incorporating graph connectivity of the features.

Usage

```
connectivity_scenario(cost_raster, features_rasters = NULL, budget_perc,
                      pre_graphs, locked_in = NULL, locked_out = NULL)
```

Arguments

cost_raster	SpatRaster object used as cost for prioritization. Its coordinates must correspond to the input given at preprocess_graphs .
features_rasters	features SpatRaster object used for prioritization. Its coordinates must correspond to the input given at preprocess_graphs .
budget_perc	numeric value [0, 1]. It represents the budget percentage of the cost to be used for prioritization.
pre_graphs	output of get_metrics function.
locked_in	SpatRaster object used as locked in constraints, where these planning units are selected in the solution, e.g. current protected areas. For details, see <code>prioritizr::add_locked_in_constraints</code> .
locked_out	SpatRaster object used as locked out constraints, where these planning units are excluded from the solution, e.g. not appropriate for protected areas. For details, see <code>prioritizr::add_locked_out_constraints</code> .

Details

A connectivity prioritization problem is created and solved using **prioritizr** package. The solver used for solving the problems is the best available on the computer, following the solver hierarchy of **prioritizr**. By default, the **highs** package using the **HiGHS** solver is downloaded during package installation.

Both features and connectivity rasters are min-max scaled before solving the prioritization problem.

Value

A list containing input for [get_outputs](#). Additionally, the connectivity SpatRaster objects that are used in prioritization are returned as well, before and after min-max scaling (`original_connectivity_rast` and `normalized_connectivity_rast` objects correspondingly).

References

Hanson, Jeffrey O, Richard Schuster, Nina Morrell, Matthew Strimas-Mackey, Brandon P M Edwards, Matthew E Watts, Peter Arcese, Joseph Bennett, and Hugh P Possingham. 2026. prioritizr: Systematic Conservation Prioritization in R. <https://CRAN.R-project.org/package=prioritizr>.

Hanson JO, Schuster R, Strimas-Mackey M, Morrell N, Edwards BPM, Arcese P, Bennett JR, and Possingham HP. 2025. Systematic conservation prioritization with the prioritizr R package. *Conservation Biology*, 39: e14376. doi:10.1111/cobi.14376

Huangfu, Qi, and JA Julian Hall. 2018. Parallelizing the Dual Revised Simplex Method. *Mathematical Programming Computation* 10 (1): 119–42. doi:10.1007/s1253201701305

See Also

[preprocess_graphs](#), [get_metrics](#)

Examples

```
# Read connectivity files from folder and combine them
combined_edge_list <- preprocess_graphs(system.file("external", package="priorCON"),
                                         header = FALSE, sep = ";")

# Set seed for reproducibility
set.seed(42)

# Detect graph communities using the s-core algorithm
pre_graphs <- get_metrics(combined_edge_list, which_community = "s_core")

cost_raster <- get_cost_raster()
features_rasters <- get_features_raster()

# Solve a prioritizr prioritization problem,
# by incorporating graph connectivity of the features
connectivity_solution <- connectivity_scenario(cost_raster=cost_raster,
                                              features_rasters=features_rasters, budget_perc=0.1, pre_graphs=pre_graphs)

# Plot solution raster
terra::plot(connectivity_solution$solution, main="Connectivity Solution")

# Plot normalized connectivity raster
terra::plot(connectivity_solution$normalized_connectivity_rast,
            main="Normalized S-Core Connectivity raster")
```

get_cost_raster

Cost raster example

Description

Cost raster example.

Usage

```
get_cost_raster()
```

Value

A cost SpatRaster object to use for examples.

Examples

```
library(tmap)

## Import features_raster
cost_raster <- get_cost_raster()

## Plot with tmap
tm_shape(cost_raster) +
  tm_raster(col.legend = tm_legend(title = "cost",
    position = c("right", "top")))
```

get_features_raster	<i>Features raster example</i>
---------------------	--------------------------------

Description

Features raster example.

Usage

```
get_features_raster()
```

Value

A features SpatRaster object to use for examples.

Examples

```
library(tmap)

## Import features_raster
features_raster <- get_features_raster()

## Plot with tmap
tm_shape(features_raster) +
  tm_raster(col.legend = tm_legend(title = "f1",
    position = c("right", "top")))
```

get_metrics	<i>Detect graph communities for each biodiversity feature.</i>
-------------	--

Description

Detect graph communities for each biodiversity feature.

Usage

```
get_metrics(connect_mat, which_community = "s_core", ...)
```

Arguments

connect_mat	a data.frame object where the edge lists are contained. See more in details.
which_community	character value for community type detection. It can be one of "s_core", "louvain", "walktrap", "eigen", "betw", "deg" or "page_rank". The default is "s_core".
...	Further arguments passed to the graph community detection algorithm. See details.

Details

Function [get_metrics](#) is used to calculate graph metrics values. The edge lists created from the previous step, or inserted directly from the user are used in this step to create graphs. The directed graphs are transformed to undirected. The function is based on the **igraph** package which is used to create clusters using Louvain and Walktrap and calculate the following metrics: Eigenvector Centrality, Betweenness Centrality and Degree and PageRank. S-core is calculated using the package **brainGraph**. Arguments added by ... are passed to the respective original functions (igraph::cluster_louvain, igraph::cluster_walktrap, igraph::eigen_centrality, igraph::strength, igraph::betweenness, igraph::page_rank, brainGraph::s_core), given that connect_mat is transformed to an undirected graph.

connect_mat is either the output of [preprocess_graphs](#) or a custom edge list data.frame object, with the following columns:

- feature: feature name.
- from.X: longitude of the origin (source).
- from.Y: latitude of the origin (source).
- to.X: longitude of the destination (target).
- to.Y: latitude of the destination (target).
- weight: connection weight.

Value

A list containing input for [basic_scenario](#) or [connectivity_scenario](#).

References

Csárdi, Gábor, and Tamás Nepusz. 2006. The Igraph Software Package for Complex Network Research. *InterJournal Complex Systems*: 1695. <https://igraph.org>.

Csárdi, Gábor, Tamás Nepusz, Vincent Traag, Szabolcs Horvát, Fabio Zanini, Daniel Noom, and Kirill Müller. 2026. igraph: Network Analysis and Visualization in R. [doi:10.5281/zenodo.7682609](https://doi.org/10.5281/zenodo.7682609).

Watson, Christopher G. 2026. brainGraph: Graph Theory Analysis of Brain MRI Data. [doi:10.32614/CRAN.package.brainGraph](https://doi.org/10.32614/CRAN.package.brainGraph).

See Also

[preprocess_graphs](#), [get_metrics](#)

Examples

```
# Read connectivity files from folder and combine them
combined_edge_list <- preprocess_graphs(system.file("external",
                                                    package="priorCON"),
                                         header = FALSE, sep = ";")

# Set seed for reproducibility
set.seed(42)

# Detect graph communities using the s-core algorithm
pre_graphs <- get_metrics(combined_edge_list, which_community = "s_core")
```

get_outputs	<i>Evaluate outputs</i>
-------------	-------------------------

Description

Evaluate outputs from [basic_scenario](#) or [connectivity_scenario](#) functions for a selected feature.

Usage

```
get_outputs(solution, feature, pre_graphs, loose = FALSE, patch = FALSE)
```

Arguments

- solution output from [basic_scenario](#) or [connectivity_scenario](#) functions.
- feature character with a single feature name used for plots.
- pre_graphs output of [get_metrics](#) function.
- loose use loose or strict graph community connectivity definition. See more in details.
- patch logical value. If patch = TRUE, then different colors can be used for each distinct patch at output plots.

Details

Loose graph connectivity indicates the case where two protected nodes (cells) can be considered connected, even if the between them cells are not protected (thus not included in the solution), whereas strict connectivity indicates the case where two protected cells can be considered connected, only if they are cells between them that are also protected. The default is loose = FALSE, indicating the use of the strict connectivity definition.

Value

A list containing the following items:

- tmap: tmap plot of the solution including connections.
- solution: **terra** SpatRaster object representing the prioritization solution.
- connections: **sf** LINESTRING object representing the preserved connections of the solution.
- connectivity_table: data.frame containing all feature names at the first column, the relative held percentages at the second column and the percentage of connections held at the third column.

References

Hijmans, Robert J. 2024. terra: Spatial Data Analysis. doi:10.32614/CRAN.package.terra.

Pebesma, Edzer. 2018. Simple Features for R: Standardized Support for Spatial Vector Data. *The R Journal* 10 (1): 439–46. doi:10.32614/RJ2018009.

Pebesma, Edzer, and Roger Bivand. 2023. Spatial Data Science: With applications in R. *Chapman and Hall/CRC*. doi:10.1201/9780429459016

See Also

[basic_scenario](#), [connectivity_scenario](#)

Examples

```
# Read connectivity files from folder and combine them
combined_edge_list <- preprocess_graphs(
  system.file("external", package="priorCON"),
  header = FALSE, sep = ";")

# Set seed for reproducibility
set.seed(42)

# Detect graph communities using the s-core algorithm
pre_graphs <- get_metrics(combined_edge_list, which_community = "s_core")

cost_raster <- get_cost_raster()
features_rasters <- get_features_raster()

# Solve a prioritizr prioritization problem, by incorporating graph connectivity
# of the features
connectivity_solution <- connectivity_scenario(
```

```

        cost_raster      = cost_raster,
        features_rasters = features_rasters,
        budget_perc      = 0.1,
        pre_graphs       = pre_graphs
    )

# Get outputs from connectivity_scenario function for feature "f1"
connectivity_outputs <- get_outputs(solution = connectivity_solution,
                                   feature   = "f1",
                                   pre_graphs = pre_graphs)

# Plot tmap
connectivity_outputs$tmap

# Print summary of features and connections held percentages for connectivity
# scenario
print(connectivity_outputs$connectivity_table)

```

graph_connectivity_rasters

Graph Connectivity Rasters

Description

Graph connectivity rasters calculation.

Usage

```
graph_connectivity_rasters(pu_raster, pre_graphs)
```

Arguments

pu_raster	SpatRaster object used as planning units for matching its non-NA cells with the coordinates described by the output of preprocess_graphs (pre_graphs). Its coordinates must correspond to the input given at get_metrics .
pre_graphs	output of get_metrics function.

Details

The graph connectivity per cell of pu_raster calculated by [preprocess_graphs](#) is transformed to a single SpatRaster object, where each layer corresponds to a different feature of pre_graphs. This pu_raster is used as SpatRaster object in terra::rasterize function and its exact non-NA values do not matter, but only the fact that they are non-NA.

Value

A SpatRaster object.

See Also

[preprocess_graphs](#), [get_metrics](#)

Examples

```
# Read connectivity files from folder and combine them
combined_edge_list <- preprocess_graphs(system.file("external", package="priorCON"),
                                         header = FALSE, sep = ";")

# Set seed for reproducibility
set.seed(42)

# Detect graph communities using the s-core algorithm
pre_graphs <- get_metrics(combined_edge_list, which_community = "s_core")

# Planning Units SpatRaster object
pu_raster <- get_cost_raster()

# Get graph connectivity rasters
f1_s_core <- graph_connectivity_rasters(pu_raster, pre_graphs)

# Plot solution raster
terra::plot(f1_s_core, main="S-Core connectivity SpatRaster of f1")
```

preprocess_graphs	<i>Read connectivity data from multiple sub-folders.</i>
-------------------	--

Description

Read connectivity data from multiple sub-folders.

Usage

```
preprocess_graphs(path, ...)
```

Arguments


path	a path of the folder where sub-folders containing txt or csv files are contained. Each sub-folder has the name of the corresponding connectivity data. In case that a connectivity folder corresponds to a specific biodiversity feature, it should be named as the corresponding feature.
...	additional arguments passed to read.csv.

Details


This is an auxiliary function for creating an edge list `data.frame` object from multiple files, like the ones provided from softwares estimating Lagrangian models.

Function `preprocess_graphs` takes as input a list of `.txt/.csv` objects. Each object represents the connections between a node and all the other nodes. For the model to read the data, it is necessary to have all the `.txt/.csv` objects in one folder. There are two ways to incorporate connectivity data, based on their linkage to features:

- Case 1: the connectivity data correspond to specific biodiversity features. If a biodiversity feature has its own connectivity dataset then the file including the edge lists needs to have the same name as the corresponding feature. For example, consider having 5 species (f1, f2, f3, f4, f5) and 5 connectivity datasets. Then the connectivity datasets need to be in separate folders named: f1,f2,f3,f4,f5 and the algorithm will understand that they correspond to the species.
- Case 2: the connectivity dataset represents a spatial pattern that is not directly connected with a specific biodiversity feature. Then the connectivity data need to be included in a separate folder named in a different way than the species. For example consider having 5 species (f1,f2,f3,f4,f5) and 1 connectivity dataset. This dataset can be included in a separate folder (e.g. "Langragian_con").

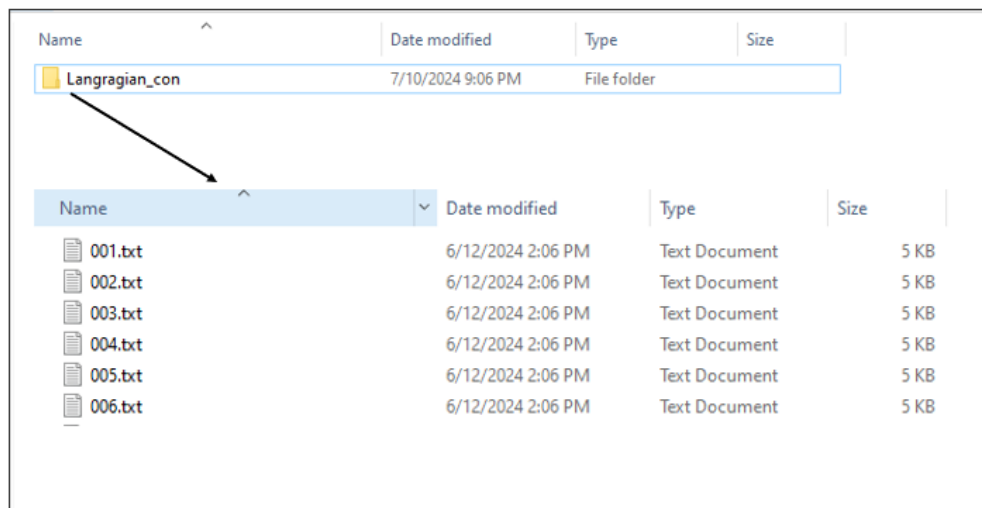

A typical Lagrangian output is a set of files representing the likelihood of a point moving from an origin (source) to a destination (target). This can be represented using a list of `.txt/.csv` files (as many as the origin points) including information for the destination probability. The `.txt/.csv` files need to be named in an increasing order. The name of the files need to correspond to the numbering of the points, in order for the algorithm to match the coordinates with the points.

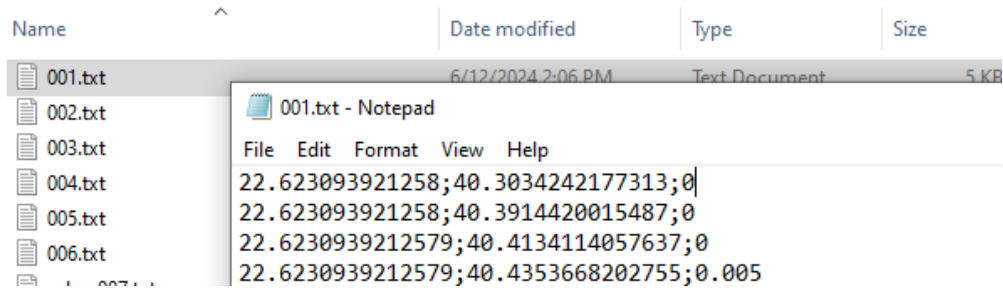

Value

an edge list data.frame object, with the following columns:

- feature: feature name.
- from.X: longitude of the origin (source).
- from.Y: latitude of the origin (source).
- to.X: longitude of the destination (target).
- to.Y: latitude of the destination (target).
- weight: connection weight.

See Also

[preprocess_graphs](#), [get_metrics](#)

Examples

```
# Read connectivity files from folder and combine them
combined_edge_list <- preprocess_graphs(system.file("external",
                                                    package="priorCON"),
                                         header = FALSE, sep = ";")

head(combined_edge_list)
```

Index

basic_scenario, [2](#), [7–9](#)

connectivity_scenario, [4](#), [7–9](#)

get_cost_raster, [5](#)

get_features_raster, [6](#)

get_metrics, [3–5](#), [7](#), [7](#), [8](#), [10](#), [11](#), [13](#)

get_outputs, [3](#), [4](#), [8](#)

graph_connectivity_rasters, [10](#)

preprocess_graphs, [2–5](#), [7](#), [8](#), [10](#), [11](#), [12](#),
[13](#)